




SLH series

Single needle, Long arm, Extra heavy duty, Large oscillating shuttle hook, Drop feed and walking foot, Lockstitch machines

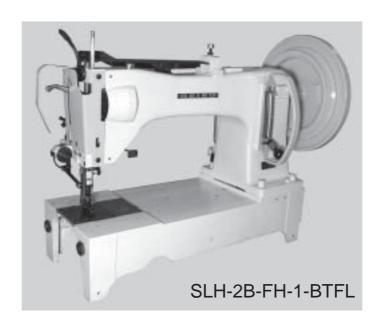


Variety

SLH-2B Reverse stitch

SLH-2B-FH-1

Reverse stitch, long needle bar stroke, high presser foot lift 32 mm 36mm high presser foot lift also available on request

20mm stitch length is available on optional request



Applications

For sewing extra heavy weight materials

Suitable for sewing products such as safety and logging belts, cargo slings, buffing wheels, harnesses, construction barriers, parachutes, balloons and book binding.







SLH series

Features

Large barrel shuttle

Extra long arm (Working space 413 mm)

Long stitch length (15 mm max.)

Reverse stitching by stitch adjusting lever or foot pedal


Cam take-up type makes perfect stitching

Synchronized walking foot and drop feeding mechanism assures uniform stitching

Extra high presser foot lift for sewing extra heavy materials

Suitable for extra thick threads (#0 - #00)

Automatic back tack (BT) and presser foot lift (FL) available



Large bobbin



SLH-2B

Specifications (SLH-)

Variety		2B	2B-FH-1
Number of needle		Single needle	
Max. sewing speed		700 s.p.m.	
Max. stitch length		19/32" (15 mm)	
Clearance under presser foot	by pedal	1-7/64" (28 mm)	1-17/64" (32 mm)
	by hand	29/32" (23 mm)	1-9/64" (29 mm)
Needle bar stroke		2-15/64" (56.7 mm)	2-19/32" (66 mm)
Needle(standard)		Schmetz 1000 (#250)	
Thread		#0 (standard) ~ #00	
Hook		Large shuttle hook	
Amount of lift of alternating		3/16"-9/32" standard 15/64"	
presser foot		(5 - 7 mm) (standard 6 mm)	
Thread take up lever		Cam type	
Lubrication		Hand type	
Bed size		25-3/4" x 10-5/32"	(654 x 258 mm)
Working space		16-1/4"x 8-37/64"	(413 x 218 mm)
Motor		Clutch motor	
Net weight(Head only)		105kg	
3 , 77			

NOTE

- (1) Speed depends on threads, materials and type of operation
- (2) Specifications subject to change without notice



SEIKO SEWING MACHINE CO., LTD.

2-13-6, Sakaecho, Funabashi-shi Chiba Prefecture, 273-0018, Japan

Phone: +81-47-420-3561 (Overseas dept.)

Fax: +81-47-420-3560

E-mail: export@seiko-sewing.co.jp

http://www.seiko-sewing.co.jp/